

VTC size / type	A	C	D	E	J	K <sub>k6</sub>	M	Q	R	S	T	Z	without insert sleeve			with insert sleeve	
													d <sub>2</sub> min.	d <sub>2</sub> max.	l <sub>2</sub> <sup>1)</sup>	d <sub>2</sub> max.	l <sub>2</sub>
366 T08	198	98,5	424	160	228	195	M 12	G1	3	-	16	8	35	65	120	55	120
422 TJ	218	103	470	185	265	220	M 12	G1-¼	3	-	16	8	45	80	135	65	135
487 TJ	246	46.5	556	202	310	265	M 12	G1-¼	3	480	16	12	45	90	155	80	155
562 TH	269	46	634	220	360	315	M 12	G1-½	3	556	15	16	50	110	170	90	170
650 TG	317	65.5	740	264	420	360	M 16	G1-½	3	649	21	16	50	120	200	100	200
750 TG	366	65	846	288	480	420	M 16	G2-¼	4	742	22	20	70	135	240	110	240
866 T05	421	77.5	978	326	555	485	M 20	G2-¼	5	862	25	12	70	150	265	120	265
1000 T05	441	66.5	1118	347	650	580	M 20	G2-¼	5	990	25	16	70	160	280	130	280
1150 T04	505	98.5	1295	402	840	770 <sup>2)</sup>	M 27	G2-¼	10 <sup>2)</sup>	1140, 34	16	70	180	320	150	320	

We reserve the right to make dimensional and constructional changes. Dimensions in mm.  
Fixing bolt: it is standard with thread to DIN 332, Sheet 2.

<sup>1)</sup> Bore depth is constantly according to „l<sub>2</sub>“.

<sup>2)</sup> For size 1150, „R“ is carried out set back as inner centering H7.



Distribution: Sales documents


Replacing: ca 17.6 (Edition: 2004-09-13)  
Originating from: *Nguyễn Tuấn Cường*

Date: 2006-11-22  
Dept.: aitt  
Issued: ESm / Pi  
Checked: HHd

**Voith Turbo GmbH & Co. KG - D-74555 Crailsheim**  
P. O. Box 1555 · Telephone (07951) 32-0 · Telefax 32-500

3644-006331 en  
Page 1 of 2



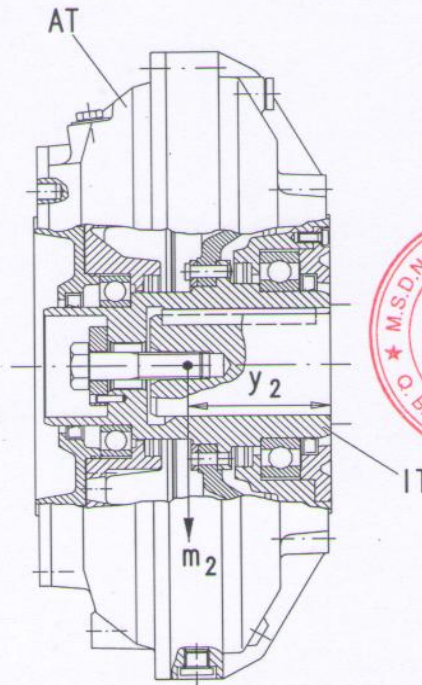

*[Handwritten signature]*  
**GIÁM ĐỐC**  
*Nghiêm Xuân Cường*



VTC size/ type	max. oil fill litre	Total weight <sup>3)</sup> kg	Weight <sup>3)</sup> VTC		Mass moment of inertia <sup>3)</sup>		Assembly- plan <sup>3)</sup> Drawing-No. 3600-
			m <sub>2</sub> kg	y <sub>2</sub> mm	( outer part ) AT kg m <sup>2</sup>	( inner part ) IT kg m <sup>2</sup>	
366 T08	6.3	38	38	103	0.50	0.13	044841
422 TJ	9.7	53	53	116	0.88	0.25	033891
487 TJ	15	80	80	122	1.67	0.56	018715
562 TH	23	118	118	138	3.28	1.14	019058
650 TG	34	185	185	160	6.77	2.40	019276
750 TG	51	285	285	183	12.93	4.98	044744
866 T05	78	467	467	212	28.74	10.16	043100
1000 T05	117	626	626	219	52.08	20.52	045686
1150 T04	196	807	807	238	85.24	42.66	045043

<sup>3)</sup> Values or indication with max. oil fill, Ød<sub>2</sub> max. and without insert sleeve.