
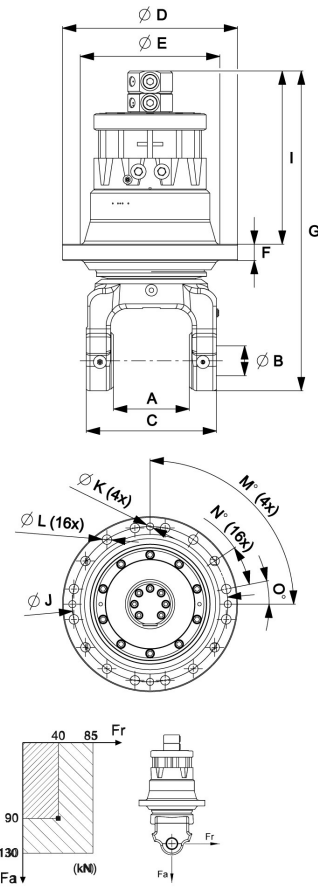


# SR 181B

Part No.: 8000940

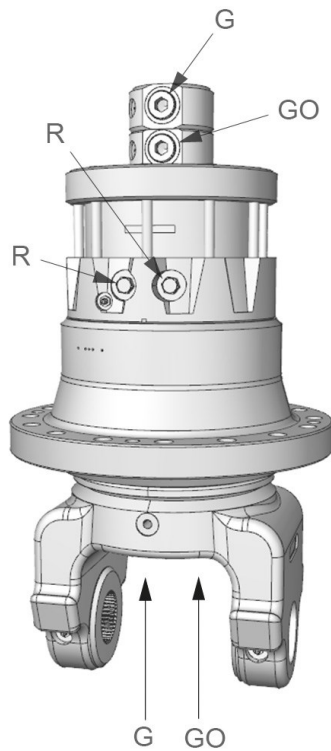

- ▨ Maximum dynamic load.
- Maximum combined load.
- ▨ Maximum peak load. (maximum 4% of working time).

| Upper connection | Lower connection | Lower              |
|------------------|------------------|--------------------|
| 1 1/16"-12 UNF   | 1 1/16"-12 UNF   | R:<br>9/16"-18 UNF |

|          |           |        |         |           |       |        |        |         |        |        |     |       |       |
|----------|-----------|--------|---------|-----------|-------|--------|--------|---------|--------|--------|-----|-------|-------|
| A:       | B:        | C:     | D:      | E:        | F:    | G:     | I:     | J:      | K:     | L:     | M:  | N:    | O:    |
| 168,9 mm | Ø66,67 mm | 290 mm | Ø390 mm | Ø311,1 mm | 36 mm | 712 mm | 386 mm | Ø346 mm | Ø16 mm | Ø21 mm | 90° | 22,5° | 11,3° |

|        |      |                             |                            |         |                 |               |               |               |
|--------|------|-----------------------------|----------------------------|---------|-----------------|---------------|---------------|---------------|
| 195 kg | 360° | Max<br>±130 kN <sup>1</sup> | Max<br>±90 kN <sup>1</sup> | 2800 Nm | Max<br>25 l/min | Max<br>25 MPa | Max<br>25 MPa | Max<br>25 MPa |
|--------|------|-----------------------------|----------------------------|---------|-----------------|---------------|---------------|---------------|

<sup>1</sup> See chart on the dimensional drawing.

For further technical information relating to integration and hydraulic connections, please contact [rotator@indexator.com](mailto:rotator@indexator.com)