



Atmen Sie auf!

IF Vario E 2000 EC

(with adjustable rpm EC-Motor 230 V)

ifs

Industriefilter - Service GmbH

Die Filter-Profis




TECHNISCHE DATEN

Standard equipping:	1x filter element aluminium mesh 25 mm 1x ionizer 1x collector cell
Air output:	adjustable up to 2000 m³/h
Weight:	approx. 120 kg
Supply voltage:	230 V / 1 Ph / N / PE / 50 Hz
Total current consumption:	approx. 3.5 A
Motor:	0.78 KW / ErP 2015
Noise level:	approx. 56 dB(A)
Collector surface:	12.9 m²



The rpm regulating capable **IF Vario E 2000 EC** is equipped with high-grade filter elements. These enable a high separation efficiency of up to 99% with a particle size of 0.01 µm. All of the filter elements are completely washable and can thus be reused. The intelligent air routing (multiple deflection of the air flow) enables above average filter service lives to be achieved. Moreover, the cleaned air can be returned in almost all cases. Separated fluids are deflected by a siphon. Thanks to the usage of high-grade sound insulation materials in the blower interior, an approx. noise level of just 56 dB(A) is achieved. The powerful and reliable electronics fulfil almost all of the common norms and standards.

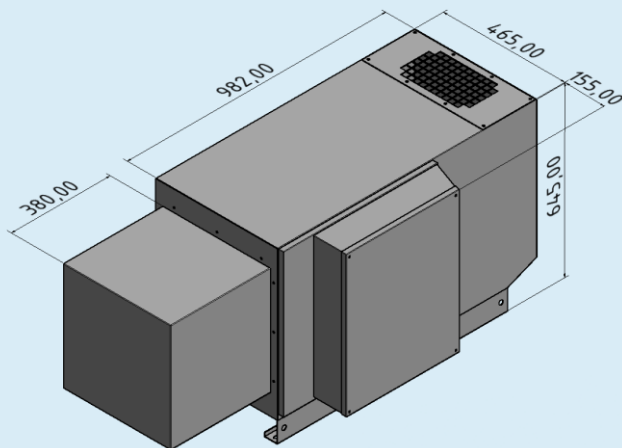

- ✓ Adjustable rpm EC-Motor
- ✓ Low maintenance costs by utilising a fully washable filter media
- ✓ The cleaned air can be returned in almost all possible cases
- ✓ Shorter machine downtimes by utilising rapid filter interchanging
- ✓ Comprehensive accessories
- ✓ Extremely quiet with approx. 56 dB(A)
- ✓ Fulfils the ErP 2015