DO NOT SCALE

THIRD ANGLE PROJECTION

DIMENSIONS IN MILLIMETRES

FIXING SCREW TORQUE SETTINGS	
M4	2.2 Nm
M5	4.3 Nm
M6	7.3 Nm
M8	17.7 Nm
M10	35.5 Nm

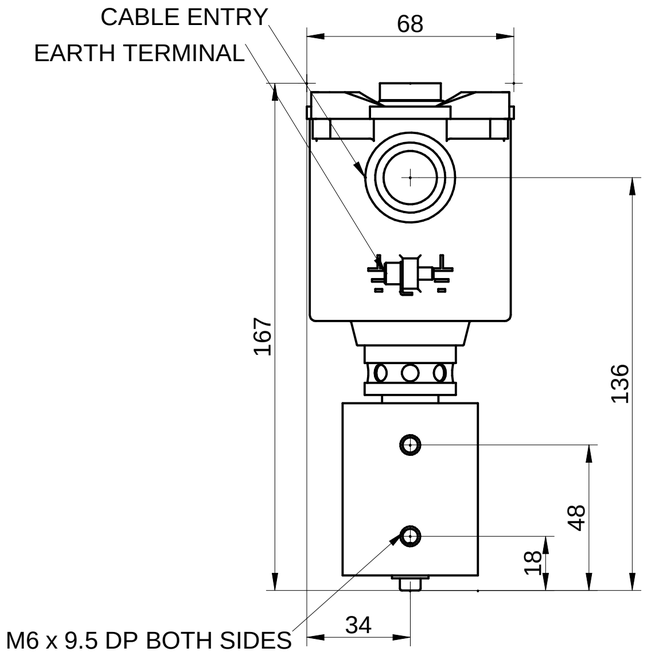

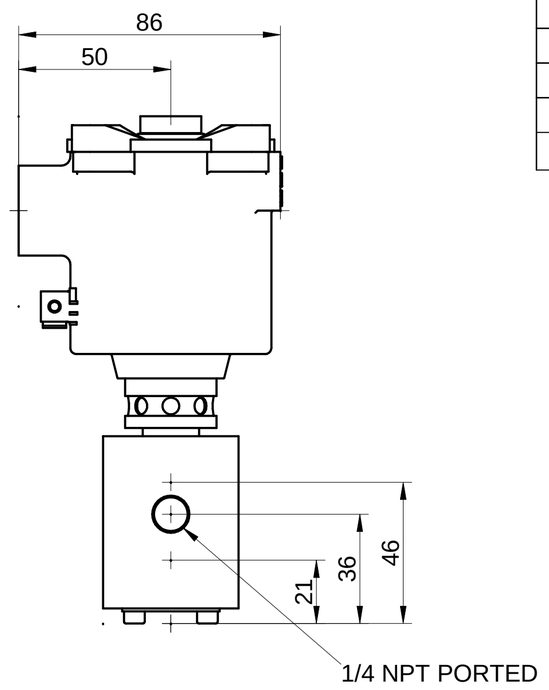



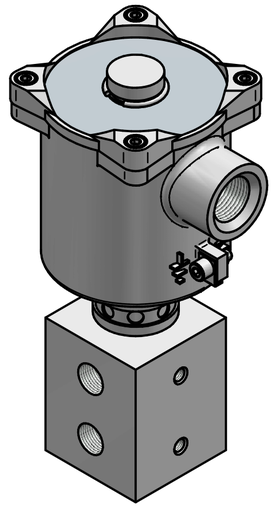

SCHEMATIC



MAINSTAGE VALVE
- NPT PORTS STANDARD (BSP PORTS - K6 OPTION)
- SUITABLE FOR UNIVERSAL OPERATION 2/2 & 3/2 NORMALLY OPEN AND NORMALLY CLOSED
- PLUG PORT 3 FOR 2/2 NORMALLY CLOSED
- PLUG PORT 1 FOR 2/2 NORMALLY OPEN

SOLENOID
- M20 x 1.5 CONDUIT ENTRY (1/2" NPT - K85 OPTION)
- FULLY ROTATABLE HOUSING

REV	DATE	DRAWN	CHKD	REVISION
0	03.07.14	CONF		PRODUCTION ISSUE

NOTES :

1.) O-RING MATERIAL CODE 'X'
- S = NITRILE
- V = VITON
- AL = FLUOROSILICONE
- AG = SILICONE

2.) ALL DIMENSIONS NOMINAL UNLESS OTHERWISE STATED.

VALVE TYPES/USED ON

Bifold Fluidpower Limited
Bifold Group, Oldham Broadway Business Park, Chadderton, Gr. Manchester OL9 9XA
Telephone (44) 0161 345 4777 Fax (44) 0161 345 4780

PROJECT TITLE	PROJECT No.
FP10P-S1-04-32-NU-X-77X-X-X	
DRAWING TITLE: GENERAL INSTALLATION	DRAWING No. 0-IN0497 / REV. 0

DRAWN	DATE	CHECKED	DATE	APPROVED	DATE
CONF	03.07.14				

Copyright © 2000 BIFOLD FLUIDPOWER LTD. All Rights Reserved

C.A.D. Produced Drawing DO NOT Change By Hand