


Nylon Protection Cable Chain with opening covers

Inner height (D) 51 mm

Double share Sideband & Frame construction with large anti-friction single-pin. Covers are opening from inner radius.

Vertical separators are available.

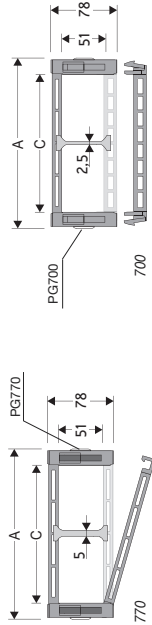

Separator

- Unassembled	Part.no S770
- Assembled	Part.no S770MC

Separator

- Unassembled	Part.no S700
- Assembled	Part.no S700MC

Technical characteristics when self-supported

Speed	6 m/s
Acceleration	30 m/s ²


For higher requirements please consult our technical dept.

A	B	C	D	R	Weight/m	Chain
mm	mm	mm	mm	mm	kg	Part Number
120	78	85	51	150-200-250-300	3,30	770085 □□□□ *
135	78	100	51	150-200-250-300	3,90	770100 □□□□ *
185	78	150	51	150-200-250-300	4,10	770150 □□□□ *
235	78	200	51	150-200-250-300	4,50	770200 □□□□ *
285	78	250	51	150-200-250-300	5,00	70025 □□ **

*Complete the code by inserting the value of the radius (R); Ex. 770085 □□□□

**Complete the code by inserting the value of the radius (R); Ex. 70025 □□

Where: 0=150; 1=200; 2=250; 3=300



Length of chain (L)


Half travel distance ($\frac{LS}{2}$) plus length of curve (M)

$$L = \frac{LS}{2} + M$$

R	H	N	M
mm	mm	mm	mm
150	378	260	615
200	478	310	770
250	578	365	930
300	678	410	1085

Self-Supporting Capacity Diagram

The maximum length of the self-supporting capacity ($\frac{LS}{2}$) in relationship to the weight of the cables and hoses contained per linear metre.



End Brackets

The end brackets set allows the two ends of the chain to be attached to the equipment.






Fig. A
The chain can be fixed frontally, inner or outer radius. (Fig A)



How to open the cover.



Special tool to remove the connecting pivots:
Part Number P2010.



For further information please consult Brevetti Stendaito's Technical Office

Nylon Type Part Numbers

Chain Type	F mm
770 C=85	100
770 C=100	115
770 C=150	165
770 C=200	215
770 C=250	265

Chain Type	Set
770... AN770□□□□*KM	AL700KM
700 C=250	AL700KM

Chain Type	Set
770... AN770□□□□*K	AL700K
700 C=250	AL700K

* Inner width (C)

